



Azionamento - Actuation

Azionamento singolo
Single actuation

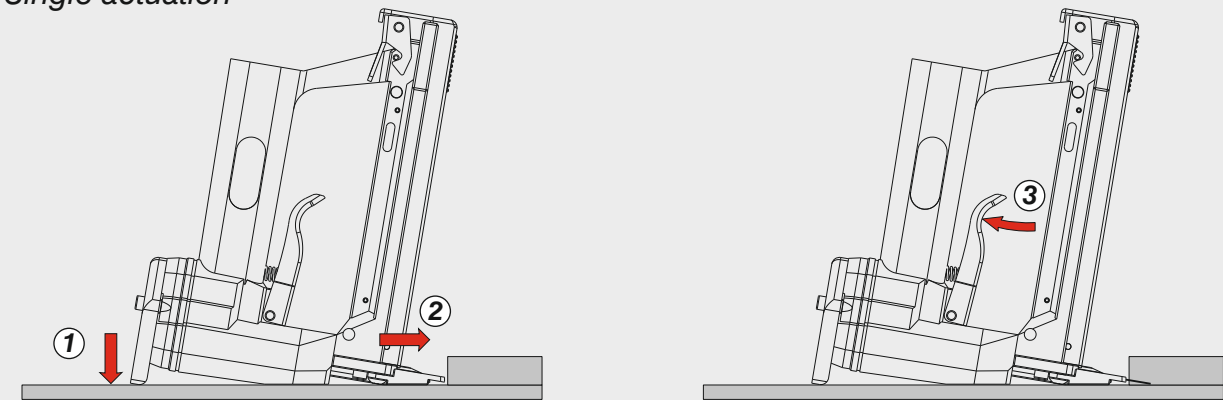


Disinceppamento - Jam clearing

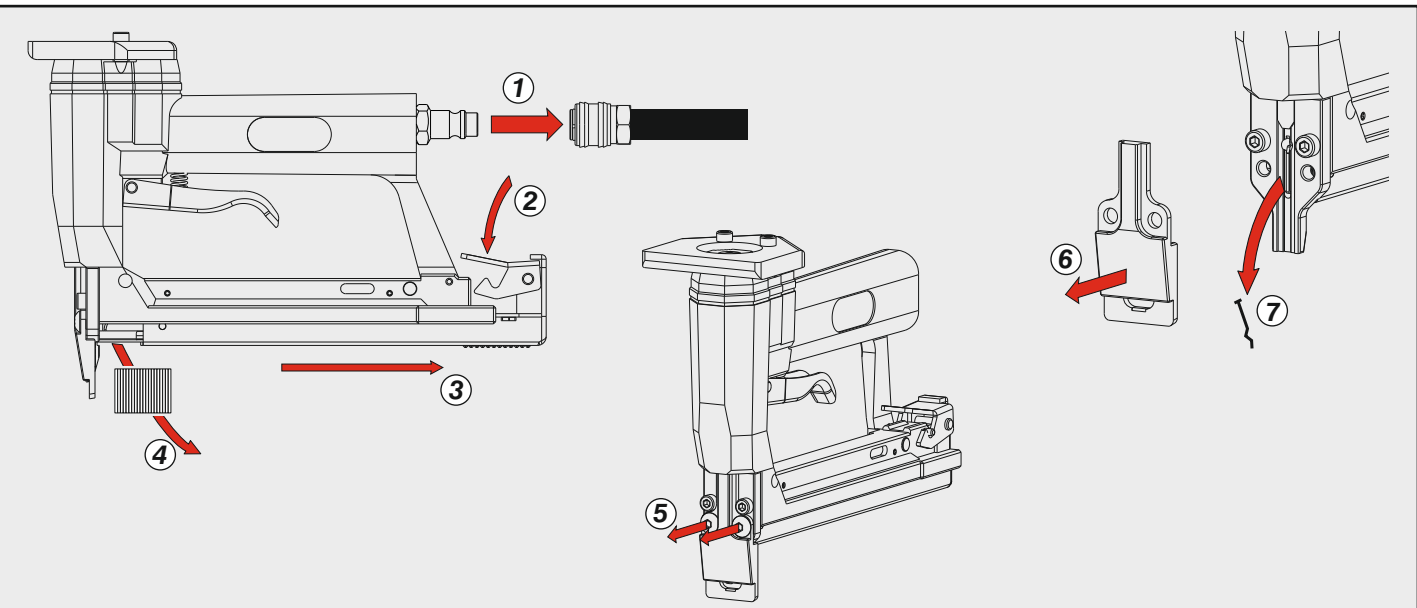

Caricamento - Loading

Caricamento da sotto
Bottom load magazine

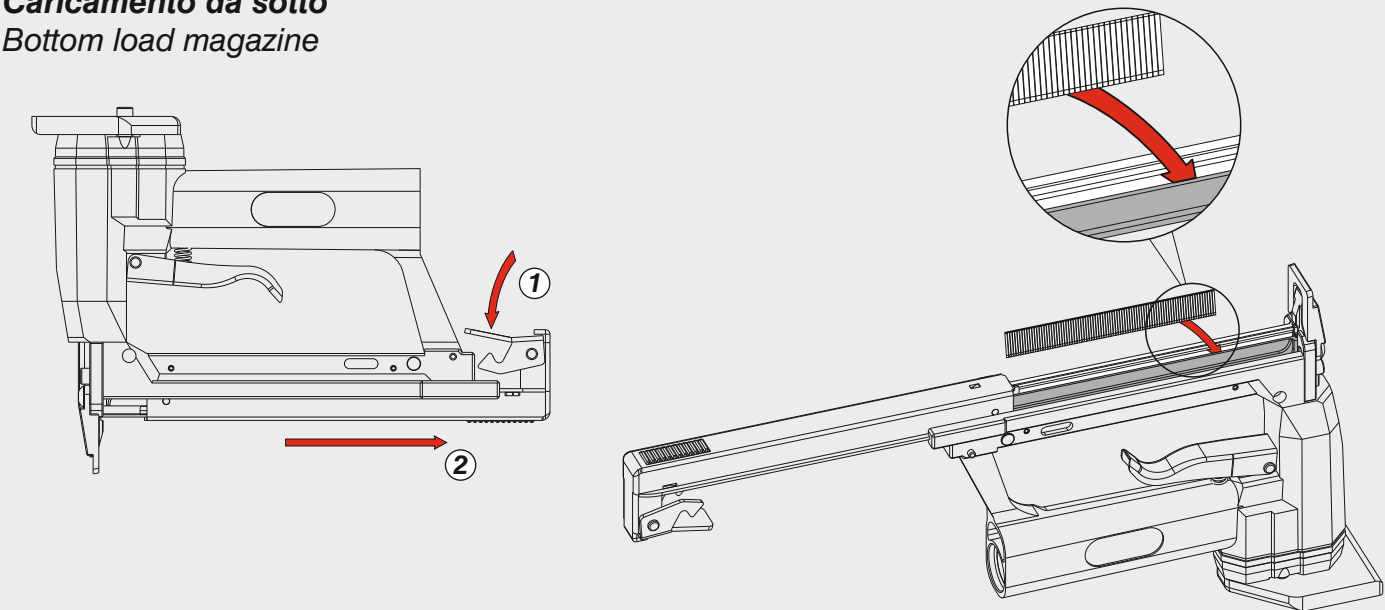

Manuale d'uso, manutenzione e parti di ricambio
Use, maintenance and spare parts manual
Gebrauchsanweisung, Instandhaltungsrichtlinien und Ersatzteile
Manuel d'utilisation, entretien et pièces de rechange
Manual de uso, mantenimiento y repuestos
Εγχειρίδιο χρήσης, συντήρησης και ανταλλακτικών
Manual de utilização, manutenção e partes sobresselentes
Handleiding voor gebruik, onderhoud en wisselstukken
Brugsanvisning, vedligeholdelse og reservedelsliste

Parte 2
Part 2
Teil 2
Partie 2
Part 2
2° Μέρος
Parte 2
Deel 2
Del 2



12.18 PF

cod. 10812100

MOLDIBER.
Zaragoza - ESPAÑA
comercial@moldiber.com

10812100_1218PF_8 231219 IV



Dati tecnici

Technical data
Technische daten

Données techniques
Datos técnicos
Τεχνικά χαρακτηριστικά

Dados técnicos
Technische gegevens
Teknische data

Misure impiegabili mm
Usable lengths mm
Gebrauchliche Längen mm

Mesures utilisables mm
Medidas que se pueden emplear mm
Διαστάσεις σε μμ

Medidas que se podem utilizar mm
Te gebruiken engtes in mm
Brugbare længder i mm

18

Capacità caricatore n° punti
Magazine capacity No. of fasteners
Magazinkapazität Nägel

Capacité chargeur n° de points
Capacidad cargador n° puntos
Δυνατότητα γεμιστέρα, σπινδότερος

Capacidade carregador n° pontos
Capaciteit magazijn in aantal spijkers
Kapacitet af magasin antal klemme

100

Pressione d'esercizio
Working pressure
Betriebsdruck

Pression de fonctionnement
Presión de trabajo
Πίεση λειτουργίας ατμ.

Pressao de trabalho
Werkdruk
Arbejds tryk bar

4÷7 bar
60÷100 psi

Consumo aria litri/colpo
Air consumption litres/shot
Luftverbrauch Liter/Schlag

Consommation air litre/coup
Consumo aire-litros/golpe
Καταναλοση αερα λ/ξτωπημα

Consumo ar litro/golpe
Luchtverbruik liter/schot
Luftforbrug liter/skud

0,10

Peso kg
Weight kg
Gewicht kg

Poids kg
Peso kg
Βαρος κγ

Peso kg
Gewicht in kg
Vægt kg

0,66

Dimensioni (AxBxH) mm
Dimensions mm
Größe mm

Dimension mm
Dimensiones mm
Δυνατότητα γεμιστέρα, σπινδότερος

Dimencoes mm
Afmetingen in mm
Dimensioner mm

209x60x160

EN 12549 :1999 ISO 11201 :1995

Pressione sonora in pos. operatore
Sound pressure at the workstation
Lärmintensität am Arbeitsplatz

Pression acoustique près de l'opérateur
Presión sonora en posición encargado
Ακουστική πίεση στη θέση χειριστού

Intensidade sonora perto do operador
Geluidssterkte op de werkplek
Lydstyrke på operatorposten

76,7 dB(A)

EN 12549 :1999 ISO 3744 :1994

Potenza sonora emessa
Emitted sound power
Ausgestrahlte Lärmintensität

Puissance acoustique émise
Potencia sonora emitida
Ακουστική ισχύς

Potência sonora emitida
Uitgestraalde geluidssterkte
Udsendt lydstryrke

82,2 dB(A)


EN 28662 :1992 ISO 5349 :1986 ISO 8662 -11

Valore medio ponderato di vibrazione
sull'impugnatura max.33 colpi
Weighted mean value of vibration
on the grip max.33 shots
Mitteler Vibrationswert, am Griff
gemessen max.33 Schläge

Valeur moyenne pondérée de vibration
mesurée sur la poignée max.33 coups
Valor medio ponderado de vibration
medida en la empuñadura max.33 golp
Μεσος ορος μετρησης κραδασιμον
στη χειρολαβη μαξ.33 ξτωπημα

Valor medio ponderado de vibracao
medida no punho max.33 golpes
Gewogen gemiddelde vibratiewaarde
max.33 schot
Middelvaardi af vibrationer på
handtaget max.33 skud

<2,5 m/s²



Tipo di punto
Type of fastener
Befestigungselement
Type d'agrafe
Tipo de punto
Τυπος καρφιου
Tipo de ponto
Type nietjes
Tilspændingstype

TS


Brads 12

1x1,25

1,9

18 - 11/16"

Head width: .075"
Gauge: 18


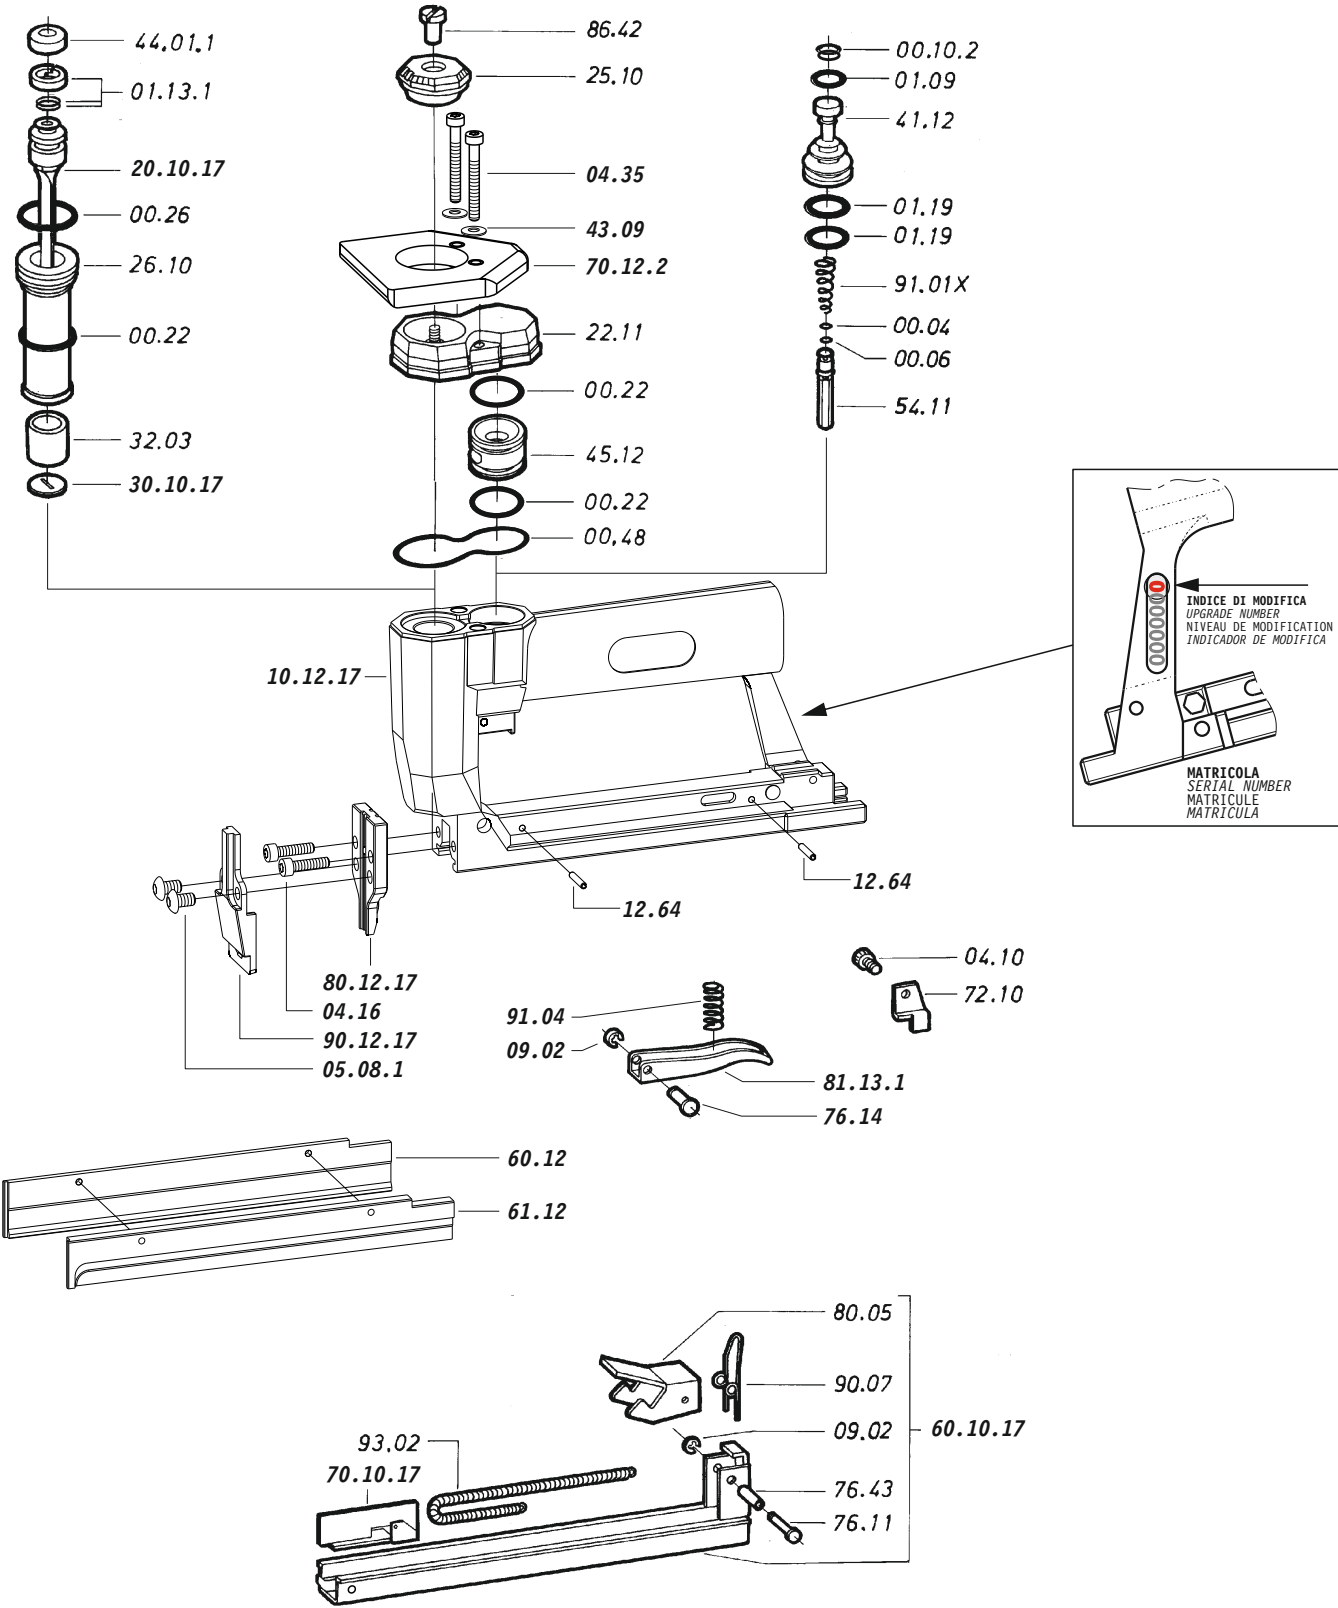


12.18 PF

cod. 10812100

Cod.	Descrizione	Description
00.04	O-Ring	O-Ring
00.06	O-Ring	O-Ring
00.10.2	O-Ring	O-Ring
00.22	O-Ring	O-Ring
00.26	O-Ring	O-Ring
00.48	O-Ring	O-Ring
01.09	O-Ring	O-Ring
01.13.1	Guarnizione	Gasket
01.19	O-Ring	O-Ring
04.10	Vite	Screw
04.16	Vite	Screw
04.35	Vite	Screw
05.08.1	Vite	Screw
07.30	Chiave esagonale	Hex. Bar wrench
09.02	Anello elastico	Elastic ring
12.64	Spina	Pin
22.11	Testa	Head
25.10	Deflettore	Exhaust deflector
26.10	Cilindro	Cylinder
32.03	Ammortizzatore	Bumper
41.12	Pistone valvola	Valve
43.09	Rondella	Washer
44.01.1	Ammortizzatore	Bumper
45.12	Anello valvola	Ring
54.11	Pulsante	Trigger valve
60.12	Guida Sx	Sx guide
61.12	Guida Dx	Dx guide
70.12.2	Supporto	Support
72.10	Fermo carrello	Slider stop
76.11	Perno	Pin
76.14	Perno	Pin
76.43	Perno	Pin
80.05	Grilletto chiusura	Trigger
81.13.1	Grilletto comando	Trigger
86.42	Vite deflettore	Deflector screw
90.07	Molla	Spring
91.01X	Molla	Spring
91.04	Molla	Spring
93.02	Molla	Spring
10.12.17	Corpo	Body
20.10.17	Battente	Driver
30.10.17	Rondella	Washer
60.10.17	Carrello	Slider
70.10.17	Spingipunto	Pusher
80.12.17	Controtestina	Nose
90.12.17	Testina	Nose plate

Guarnizioni - O-Rings - Dichtungen - Joints - Kit O-rings - Λαστιχακια - Kit O-rings - Pakninger



12.18 PF

cod. 10812100

Indice di modifica
Upgrade number

8